


Solid State Relay Industrial, Rear Integrated Heatsink 3-Independently Switched Poles Types RJT3A - Trio

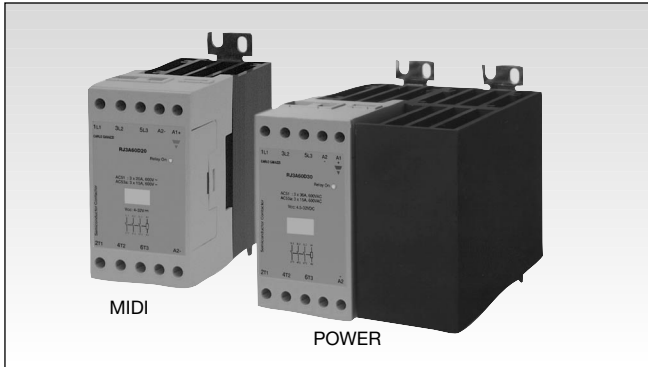

- 3 in 1 Semiconductor contactor
- Three control inputs - three independently switched poles
- Direct copper bonding (DCB) technology
- LED indication for each pole
- Housing free of moulding mass
- Input range: 4 – 32 VDC
- Operational ratings: up to 3x25AAC, 600VAC
- Non repetitive peak voltage: Up to 1200V_p
- Opto-isolation > 4000 VAC_{rms}

Preliminary Datasheet

Product Description

This product is designed in such a way as to replace electro-mechanical contactors, especially when switching is frequent. It has an integrated heatsink and over-voltage protection. The heatsink is moved to the back for optimal space saving in the panel and easy wire mounting at the front of the relay.


The relay with antiparallel

thyristor output can be used for resistive and inductive loads.

RJT3A comes with 3 independently controlled poles, with three LEDs to indicate status for each of the control inputs. Each zero switching relay switches ON when the sinusoidal curve crosses zero and switches OFF when the current crosses zero.

Ordering Key

RJT3A60D25

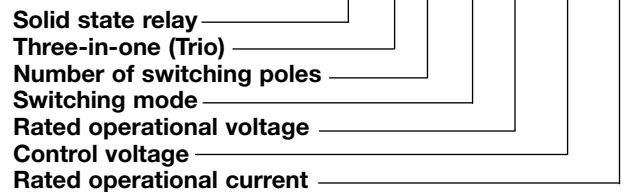

Type selection

Switching poles	Switching mode	Rated operational voltage	Control voltage	Rated operational current
RJT3: 3 poles	A: Zero switching	23: 230 VAC _{rms} 60: 600 VAC _{rms}	D: 4 - 32 VDC	20: 3 x 20 AAC _{rms} 25: 3 x 25 AAC _{rms}

Selection Guide

Rated operational voltage	Control voltage	Rated operational current	
		3 x 20 (MIDI)	3 x 25 (POWER)
230 VAC _{rms}	4-32VDC	RJT3A23D20	RJT3A23D25
600 VAC _{rms}	4-32VDC	RJT3A60D20	RJT3A60D25

General Specifications

	RJT3A23...	RJT3A60...
Operational voltage range	24 - 280 VAC	40 - 660 VAC
Non-rep. peak voltage	650 V _p	1200 V _p
Operational frequency range	45 - 65 Hz	45 - 65 Hz
Power factor	≥ 0.5 @ 230 VAC _{rms}	≥ 0.5 @ 600 VAC _{rms}
Approvals	UL*, cUL*	UL*, cUL*
CE-marking	Yes	Yes

* Approvals pending

Output Specifications

	RJT3A...20 (MIDI)	RJT3A...25 (POWER)
Rated operational current AC51 @Ta=25°C AC53a @Ta=25°C	3 x 20 A 3 x 15 A	3 x 25 A 3 x 15 A
Min. operational current	150 mA	150 mA
Rep. overload current t=1s	<125 A	<125 A
Non rep. surge current Tj(init.)= 25°C and t=10ms	600 Apk	600 Apk
Off-state leakage current @ rated voltage & frequency	< 3 mA	< 3 mA
I ² t for fusing (t = 10 ms)	1800 A ² s	1800 A ² s
Critical di/dt	≥ 100 A/μs	≥ 100 A/μs
On-state voltage drop @ rated current 1.6 Vrms	1.6 Vrms	
Critical dv/dt commutating	500 V/μs	500 V/μs
Critical dV/dt off-state	500 V/μs	500 V/μs

Input Specifications

	RJT3A.....
Control voltage range	4 - 32 VDC
Pick-up voltage	3.8 VDC
Reverse voltage	32 VDC
Drop-out voltage	1 VDC
Maximum input current	12 mA
Response time pick-up	<1 cycle
Response time drop-out	<1 cycle

Housing Specifications

Weight	
MIDI	Approx. 380 g
POWER	Approx. 680 g
Housing material	PBT
Conductors	
Size	0.5...4.0 mm ² (AWG 20...12) 2x0.5...2x2.5 mm ² (AWG 2x20...2x14)
Tightening torque max.	0.6 Nm



Thermal Specifications

Operating Temperature	-30 to +70°C
Storage temperature	-40 to +80°C

Insulation

Rated insulation voltage	
Input to output	≥ 4000 VACrms
Output to case	≥ 4000 VACrms


Dimensions

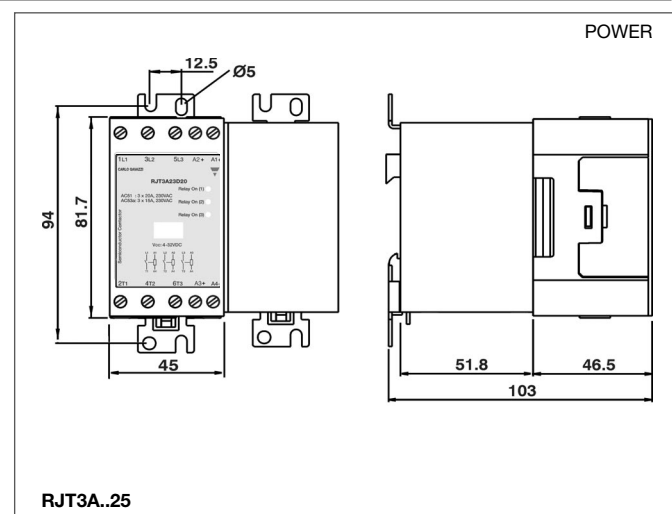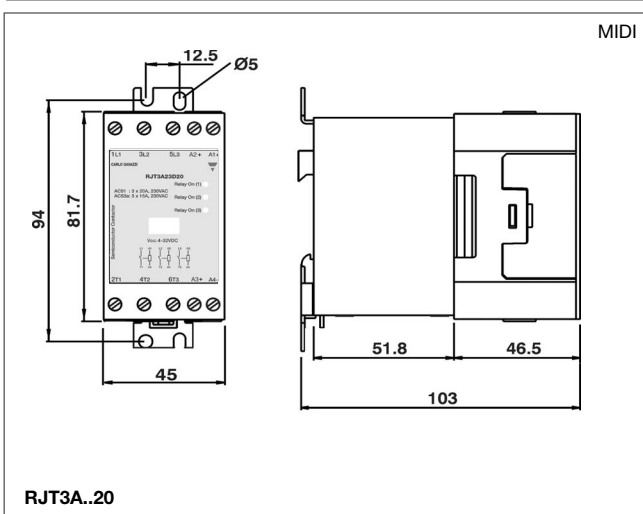


Connection Examples

- ¥ Application of DC voltage across terminals A1-A4 will activate pole L1-T1. The top green LED indicates the status of the control input across terminals A1-A4.
- ¥ Application of DC voltage across terminals A2-A4 will activate pole L2-T2. The middle green LED indicates the status of the input voltage across terminals A2-A4.
- ¥ Application of DC voltage across A3-A4 will activate pole L3-T3. The bottom green LED indicates the status of the input voltage across terminals A3-A4.
- ¥ For 3-Phase control, A1, A2 and A3 can be connected together to switch all three poles simultaneously.

Derating Curve (100% duty on 3 Poles)

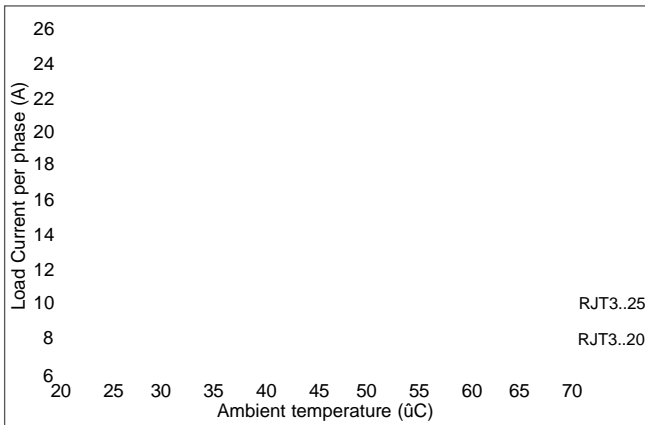

Dissipation Curve (100% duty on 3 Poles)

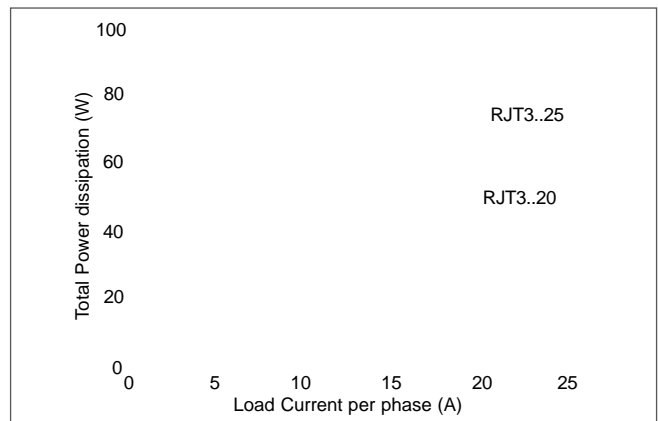

Terminal Layout

